



STARLIGHT® FR
Flame Retardant

PARA
TEMPOTEST®
ITALIAN PERFORMANCE FABRICS

AWING EXTENSIONS, TOOLS & SUPPLIES
**SUPPLY
BRIGHT**

AWING EXTENSIONS, TOOLS & SUPPLIES
t: 844-448-3207
Sales@SupplyBright.Net





Awning Extrusions, Tools & Supplies
 t: 844-448-3207
 Sales@SupplyBright.Net

Width	60 inch (UNI EN 1773/98)
Thickness	0,017 inch
Weight	8.8 oz/yd ² (+/- 5%)
Water column	≥ 14 inch (UNI EN 20811)
Spray Test	Grade 4 (UNI EN 24920)
Finishing	Teflon™ treatment, soil and mould resistant, water repellent
Lightfastness	4/5 - 5 degree grey scale (UNI EN ISO 105-B04, 1000 hours)
Breaking load	Warp 2300 N - elongation 40% Weft: 1100 N - elongation 40% (UNI EN 13934-1)
Fire resistance	Class 1 (UNI EN 9177) B1 (DIN 4102) NFPA 701-10 MVSS 302 TITLE 19-SECTION 1237 CPAI 84
Maintenance	Brush with water and mild soap. Rinse thoroughly. Dry before rewinding.

PET fibre with Flame Retardant properties. The characteristics of high-tenacity, excellent colour fastness to sunlight and resistance to UV attack, are enhanced with excellent flame-retardant performance. Moreover, thanks to the Teflon EXTREME treatment by Parà, TEMPOTEST STARLIGHT FR® is hydro and oil-repellent, anti-mould, stain and salt resistant. TEMPOTEST STARLIGHT FR® is particularly suitable for uses in public areas such as hotels, bars, restaurants and public places.

The technical and performance data are available on www.tempotestusa.com

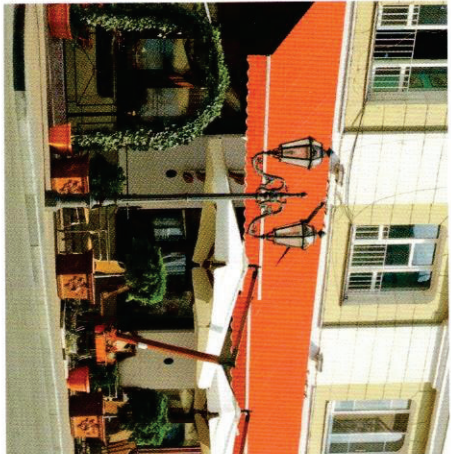

Flame retardant

Recyclable

Water-repellent

Weldable

UV stability

Duration of the colours

Dimensional stability

Easy to clean

T6015/300-60



T6015/301-60



T6090/300-60



T6929/300-60



T6079/300-60



T6097/300-60



T6008/300-60



T6930/300-60



T6024/300-60



T6012/300-60



T6011/300-60



T6073/300-60



T6416/300-60



T6092/300-60



Aming Extensions, Tools & Supplies
t:844-448-3207
Sales@SupplyBright.net

